



The GF 2552 Metal Magmeter from Georg Fischer features all-stainless steel construction. The PVDF nosepiece and FKM O-rings are the only other wetted materials. The 2552 installs quickly into standard 1¼ in. or 1½ in. pipe outlets, and is adjustable to fit pipes from DN50 to DN2550 (2 to 102 in.). Two sensor lengths allow maximum flexibility to accommodate a variety of hardware configurations, including ball valves for hot-tap installations.

When equipped with the frequency output, the 2552 is compatible with any externally powered GF flow instrument, while the digital (S³L) output enables multi-channel compatibility with GF 8900, 9900 or 9950 Multi-Parameter instruments. Select the blind 4 to 20 mA current output to interface directly with data loggers, PLCs or telemetry systems. Key features include Empty Pipe Detection, LED-assisted troubleshooting, and bi-directional span capability (in 4 to 20 mA models).

The GF 3-0252 Configuration Tool is available to customize every performance feature in the 2552 so it can be adapted to the user's application requirements.

Features

- NIST test certificate included
- Award winning hot-tap magnetic flow sensor up to DN2550 (102 in.)
- Patented Magmeter technology*
- Operating range 0.05 to 10 m/s (0.15 to 33 ft/s)
- Reliable operation in harsh environments
- Repeatable: ±0.5% of reading @ 25 °C
- Three output options: 4 to 20 mA, Frequency/ Digital (S³L)
- ISO or NPT Threads



Applications

- Municipal Water Distribution
- Process and Coolant Flow
- Chemical Processing
- Wastewater
- Mining Applications
- Water Process Flow
- HVAC

* U.S. Patent No: 7,055,396 B1

Specifications

General

Operating Range	Minimum		0.05 m/s	0.15 ft/s
	Maximum	pipes to DN1200 (48 in.)	10 m/s	33 ft/s
		pipes over DN1200 (48 in.)	3 m/s	10 ft/s
Pipe Size Range	DN50 to DN2550		2 to 102 in.	
Linearity	± 1% reading plus 0.1% of full scale			
Repeatability	±0.5% of reading @ 25 °C			
Accuracy	±2% of measured value*			

*In reference conditions where the fluid is water at ambient temperature, the sensor is inserted at the correct depth and

there is a fully developed flow profile which is in compliance with ISO 7145-1982 (BS 1042 section 2.2)

Minimum Conductivity	20 µs/cm
----------------------	----------

Wetted Materials

Body and Electrodes	316L stainless steel
Insulator	PVDF
O-rings	FKM
Cable	4-cond + shield, PVC jacket (Fixed cable models) or Water-resistant rubber cable assembly with Turck® NEMA 6P connector

Power Requirements

4 to 20 mA	24 VDC ±10%, regulated, 22.1 mA maximum
Frequency	5 to 24 VDC ±10%, regulated, 15 mA maximum
Digital (S ³ L)	5 to 6.5 VDC 15 mA maximum

Reverse Polarity and Short Circuit Protected


Cable Options

Fixed Cable	7.6 m	25 ft
Detachable water tight sensor cable with Turck® connector (sold separately) two lengths: 4 m (13 ft) or 6 m (19.5 ft)		






Specifications (continued)

Electrical			
Current Output (4 to 20 mA)	Programmable and Reversible		
	Loop Accuracy	32 μ A max. error (@ 25 °C @ 24 VDC)	
	Temperature Drift	\pm 1 μ A per °C max.	
	Power Supply Rejection	\pm 1 μ A per V	
	Isolation	Low voltage < 48 VAC/DC from electrodes and auxiliary power	
	Maximum Cable	300 m	1000 ft
	Maximum Loop Resistance	300 Ω	
Error Condition	22.1 mA		
Frequency Output	Compatible with	GF 8900, 9900, 9900-1BC and 9950	
	Maximum Pull-up Voltage	30 VDC	
	Short Circuit Protected	\leq 30 V @ 0 Ω pull-up for one hour	
	Reverse Polarity Protected	to -40 V for 1 hour	
	Overvoltage Protected to +40 V for 1 hour		
	Maximum Current Sink	50 mA, current limited	
	Maximum Cable	300 m	1,000 ft
Digital (S ³ L) Output	Compatible with	GF 8900, 9900, 9950 and 0486	
	Serial ASCII, TTL level 9600 bps		
	Maximum Cable	Application dependent (See 8900 or 9900 manual) in non-icing conditions	
Operating Temperature	Ambient (non-icing conditions)	-15 °C to 70 °C	5 °F to 158 °F
	Media	-15 °C to 85 °C	5 °F to 185 °F
Max. Operating Pressure	20.7 bar @ 25 °C	300 psi @ 77 °F	
Hot-Tap Installation Requirements			
Maximum Installation Pressure	20.7 bar	300 psi	
Maximum Installation Temp (Insertion/Removal)	40 °C	104 °F	
Do not use hot-tap installation where temperatures will exceed 40 °C or if hazardous liquids are present.			
Shipping Weights			
3-2552-2X-A-11/A-12	2.50 kg	5.51 lb	
3-2552-2X-B-11/B-12	2.30 kg	5.07 lb	
3-2552-3X-A-11/B-11/A-12/B-12	4.00 kg	8.81 lb	
Standards and Approvals			
CE, FCC			
RoHS compliant, China RoHS			
NEMA 4 (IP65)	Fixed cable models		
NEMA 6P (IP68)	Submersible cable models only. GF recommends maximum 3 m (10 ft) submersion depth for maximum 10 days continuous submersion.		
Manufactured under ISO 9001, ISO 14001 and ISO 45001			


Dimensions

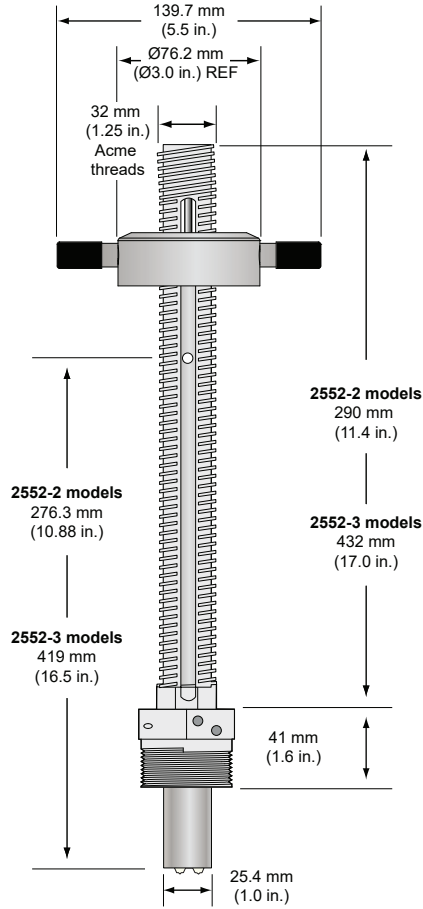

System Overview

Panel Mount	Pipe, Tank, Wall	4 to 20 mA Output	Automation System
GF Instruments - 8900 - 9900-1P - 9900-1BC - 9950 	GF Instruments - 9900-1 with 3-8050 Universal Mount Kit - 9900-1BC with Rear Enclosure - 9950 	- Customer Supplied Chart Recorder, Programmable Logic Controller or - Programmable Automation Controller 	- 0486 Profibus Concentrator and Customer Supplied Programmable Logic Controller or - Programmable Automation Controller 
GF 2551 Magmeter			

ball or gate valve
1¼" or 1½"



nipple
1¼" or 1½"



Weld-on
wel-
dolet
1¼" or
1½"
outlet



Iron strap-on saddle
1¼" or 1½" outlet



All Sold Separately

Sensor Selection Guide

The 2552 Magmeter can be installed into a variety of pipe sizes. Follow the steps below to ensure that you choose the right sensor for your application.

Step 1: Determine how the sensor will be installed

A. For standard (non Hot-Tap) installations:

The height of the weldolet (threadolet) and pipe adapter(s) should be determined before the sensor is purchased.

- For retrofit installations, the stack height, or "A" dimension (see Fig. 1), is the overall height from the top of the pipe to the highest point of the stack.
- Sensor tip must be positioned at 10% of pipe ID
- For new installations, GF recommends a weldolet (threadolet) and an adapter to accommodate the 1¼ in. (or 1½ in. for 2552-3) sensor process threads. The stack height, or "A" dimension (see Fig. 1), is the overall height from the top of the pipe to the highest point of the stack before the sensor is connected

B. For Hot-Tap installations:

The stack height of the ball valve, nipple weldolet (threadolet) and pipe adapters should be determined before the sensor is purchased.

- For retrofit installations, the ball valve must be at least a 1¼ in. (or 1½ in. for 2552-3) valve. The stack height, or "A" dimension (see Fig. 2), is the overall height from the top of the pipe to the top of the ball valve.
- Sensor tip base must be positioned at 10% of pipe ID
- For new installations, GF recommends a 1¼ in. or 1½ in. full port ball valve, a short nipple and a weldolet (threadolet). The stack height or "A" dimension (see Fig. 2) is the overall height from the top of the pipe to the top of the ball valve before the sensor is connected.

Fig. 1
Standard installation with "A" dimension using a weldolet (threadolet)


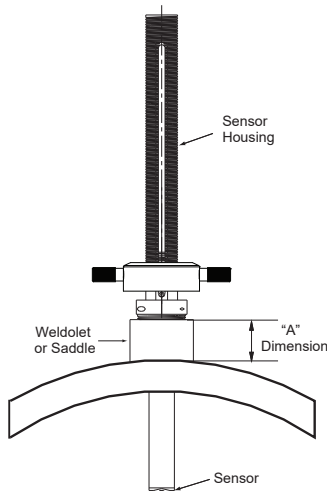


Fig. 2
Hot-Tap installation with "A" dimension using a ball valve, short nipple and weldolet (threadolet)

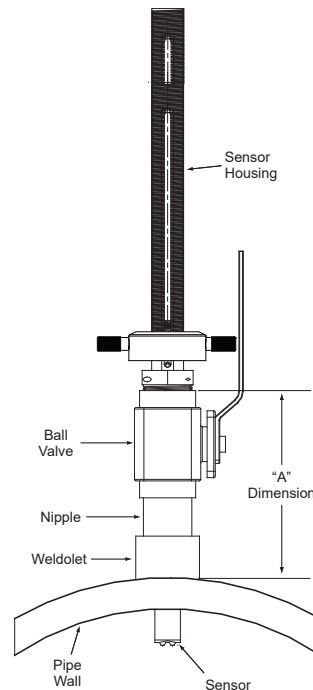

Step 2: Determine how the sensor will be installed

Once the "A" dimension is determined, go to the sensor selection table and find your "A" dimension on the left column. Next, find the appropriate pipe size at the top of the chart. To determine the correct sensor size locate where the pipe size column meets the max "A" dimension row.

		Pipe Size																											
		DN	inches	2	2.5	3 to 3 1/2	4	5	6 to 8	10	12 to 14	16	18	20	22	24	26 to 28	30 to 32	34	36 to 38	40 to 42	48	54	60	66	72	78	84	102
Max. "A" Dim	mm	inches	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	3	3	3	3	3	3
	50.8	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	63.5	2.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	76.2	3	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	88.9	3.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	101.6	4	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	114.3	4.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	127	5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	139.7	5.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	152.4	6	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	165.1	6.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	177.8	7	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	190.5	7.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	228.6	9	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	241.3	9.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	254	10	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	266.7	10.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	279.4	11	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	292.1	11.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
	304.8	12	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	
317.5	12.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
330.2	13	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
342.9	13.5	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
355.6	14	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
375.9	14.8	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2		
381	15	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2	2		

Legend:

2: Use 3-2552-2, max. insertion = 236 mm (9.3 in.)

3: Use 3-2552-3, max. insertion = 368 mm (14.8 in)

This chart is based on the thickest commonly available pipe.

Step 3: Refer to Ordering Information to select corresponding part numbers


Ordering Notes

- 1) Sensor insertion depth is the distance from the bottom of the sensor housing to the tip of the sensor.
- 2) Hot-Tap installations require a 1 ¼ in. or 1 ½ in. ball valve.
- 3) See Sensor Selection Guide on previous page to determine the sensor length required.

Application Tips

- Minimum process liquid conductivity requirement is 20 µS/cm.
- 1 ½ x 1 ¼ in. and 2 x 1 ¼ in. (2552-2 only) retrofit adapters are available for replacement installations of GF 2552 and 2540 sensors.

Ordering Information

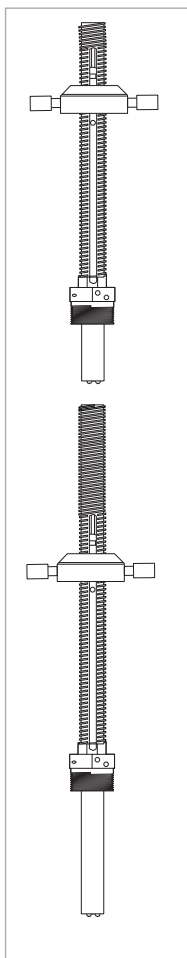

Mfr. Part No.	Code	Sensor Insertion Depth	Process Connection Thread Options
Frequency or Digital (S³L) output			
for use with any GF Flow or Multi-Parameter Instruments			
Fixed Cable, 7.6 m (25 ft); No Connector			
3-2552-21-A-11	159 001 513	9.3 in.*	1 ¼ in. NPT**
3-2552-22-A-11	159 001 517	9.3 in.*	1 ¼ in. ISO**
3-2552-33-A-11	159 001 521	14.8 in.*	1 ½ in. NPT**
3-2552-34-A-11	159 001 522	14.8 in.*	1 ½ in. ISO**
Watertight Sensor Connector; Cable Sold Separately			
3-2552-21-B-11	159 001 515	9.3 in.*	1 ¼ in. NPT**
3-2552-22-B-11	159 001 519	9.3 in.*	1 ¼ in. ISO**
3-2552-33-B-11	159 001 523	14.8 in.*	1 ½ in. NPT**
3-2552-34-B-11	159 001 524	14.8 in.*	1 ½ in. ISO**
4 to 20 mA output			
Fixed Cable, 7.6 m (25 ft); No Connector			
3-2552-21-A-12	159 001 514	9.3 in.*	1 ¼ in. NPT**
3-2552-22-A-12	159 001 518	9.3 in.*	1 ¼ in. ISO**
3-2552-33-A-12	159 001 525	14.8 in.*	1 ½ in. NPT**
3-2552-34-A-12	159 001 526	14.8 in.*	1 ½ in. ISO**
Watertight Sensor Connector; Cable Sold Separately			
3-2552-21-B-12	159 001 516	9.3 in.*	1 ¼ in. NPT**
3-2552-22-B-12	159 001 520	9.3 in.*	1 ¼ in. ISO**
3-2552-33-B-12	159 001 527	14.8 in.*	1 ½ in. NPT**
3-2552-34-B-12	159 001 528	14.8 in.*	1 ½ in. ISO**

* Customer must determine stack height (ball valve, nipple, weldolet, etc.). Refer to Sensor Selection on previous page to determine "A" dimension. Sensor tip must be positioned at 10% of pipe ID.

** 1 ¼ in. process connection is the standard thread size on the 3-2552-2X-X-XX: For the 2552-3 the 1 ½ in. process connection is standard and the 1 ¼ in. is available as a special order.

Accessories and Replacement Parts

Mfr. Part No.	Code	Description
2120-1512	159 001 425	1½ x 1¼ inch NPT adapter for retrofitting 2540 installation to 2552 - 316 SS
2120-2012	159 001 426	2 x 1¼ inch NPT adapter for retrofitting 2550 installation to 2552 - 316 SS
3-2552.392	159 001 530	1¼ inch NPT full port stainless steel ball valve and nipple kit
3-2552.393	159 001 531	1¼ inch NPT full port brass ball valve & nipple kit
3-2552.394	159 001 532	1½ inch NPT conduit adapter, aluminum for -1 and -2 units
4301-2125	159 001 533	1¼ inch NPT full port ball valve - brass
4301-3125	159 001 387	1¼ inch NPT full port ball valve - stainless steel
5541-4184	159 001 388	4-conductor cable assembly with water-tight connector, 4 m (13 ft)
5541-4186	159 001 389	4-conductor cable assembly with water-tight connector, 6 m (19.5 ft)
special order	special order	4-conductor cable assembly with water-tight connector, cable length in 25 ft increments
special order	special order	1¼ in. NPT or ISO process connection threads to replace 1½ in. NPT or ISO threads
3-0252	159 001 808	Configuration Tool